

## MOUNTING ACCESSORIES

### TERMINALS



Type 'A'  
Dual QC



Type 'C'  
Single QC



Type 'X'  
Dual QC  
w/Solder Lug



Type 'W'  
w/Female QC



Type 'W'  
#18ga. Insulated,  
Stranded Copper Wire  
[Standard: 12-14" length with 1/2" stripped  
Ends (other length's available.)]




### END CAPS



Standard






Type 'A'



| Case # | P/N          | Dia.   | 'A'±0.010 | 'B'±0.003 | 'C'±0.005 | 'D'±0.003 |
|--------|--------------|--------|-----------|-----------|-----------|-----------|
| 1,2,3  | 670400 0074  | 17/16  | 1.437     | 0.080     | 1.093     | 1.241     |
| 4&5    | 670400 0075  | 113/16 | 1.812     | 0.110     | 1.468     | 1.611     |
| 6&7    | 670400 0076  | 21/16  | 2.062     | 0.235     | 1.718     | 1.866     |
| 8      | 670400 0102C | 29/16  | 2.562     | 0.485     | 2.218     | 2.366     |

### BRACKET

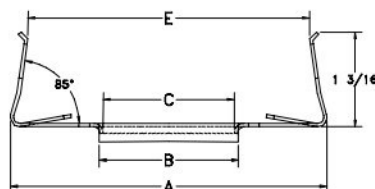

| Case #  | P/N         | 'A'   | 'B'   | 'C'   | 'D'   | 'E'   |
|---------|-------------|-------|-------|-------|-------|-------|
| 1       | 670036 0941 | 3.375 | 1.171 | 1.062 | 1.258 | 3.015 |
| 2,4,6   | 670036 0943 | 4.050 | 1.812 | 1.703 | 1.578 | 3.656 |
| 3,5,7,8 | 670036 0944 | 5.050 | 2.718 | 2.000 | 2.078 | 4.656 |

All dimensions ±0.015".

Material I—0.042" Spring Steel.  
Finish—Black Parkerize.